


BTV3

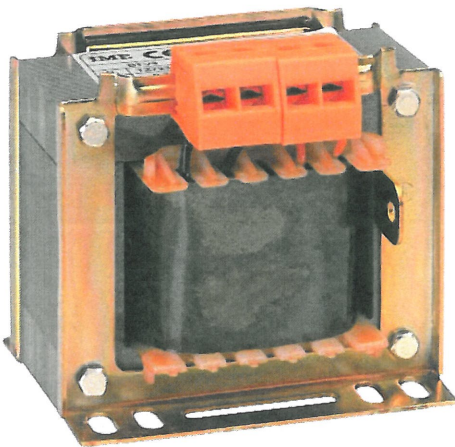

Spannungswandler

Primärspannung 100:√3V...600V
Sekundärspannung
100 - 110V - 100:√3V - 110:√3V

Single-phase voltage transformer

Primary voltage 100:√3V...600V
Secondary voltage
100 - 110V - 100:√3V - 110:√3V

Angewandte Normen

EN60044-2, BS3941

Reference standards

EN60044-2, BS3941

Gehäuse

Metallgehäuse
Schutzart (EN60529): IP00
Fußbefestigung zur Wandmontage
Tropenausführung
Gewicht: 2350 Gramm

Housing

Metallic housing
Protection degree (EN60529): IP00
Fixing screw facility for wall mounting
Tropicalized version
Weight: 2350 grams

Anschluss

Primär - Sekundär:
Schraubanschluss

Connections

Primary - secondary winding:
screw terminal box

Nennspannung primär Rated primary voltage		Nennspannung sekundär Rated secondary voltage			
Bürde/Klasse Burden/class		100V	110V	100:√3V	110:√3V
6VA/1	3VA/1	Bestellnummer Order code			
100		TVVAC100C100	TVVAC100C110		
110		TVVAC110C100	TVVAC110C110		
115		TVVAC115C100	TVVAC115C110		
220		TVVAC220C100	TVVAC220C110		
230		TVVAC230C100	TVVAC230C110		
240		TVVAC240C100	TVVAC240C110		
380		TVVAC380C100	TVVAC380C110		
400		TVVAC400C100	TVVAC400C110		
440		TVVAC440C100	TVVAC440C110		
450		TVVAC450C100	TVVAC450C110		
500		TVVAC500C100	TVVAC500C110		
600		TVVAC600C100	TVVAC600C110		
	100:√3			TVVAG100G100	TVVAG100G110
	110:√3			TVVAG110G100	TVVAG110G110
	115:√3			TVVAG115G100	TVVAG115G110
	220:√3			TVVAG220G100	TVVAG220G110
	230:√3			TVVAG230G100	TVVAG230G110
	240:√3			TVVAG240G100	TVVAG240G110
	380:√3			TVVAG380G100	TVVAG380G110
	400:√3			TVVAG400G100	TVVAG400G110
	440:√3			TVVAG440G100	TVVAG440G110
	450:√3			TVVAG450G100	TVVAG450G110
	500:√3			TVVAG500G100	TVVAG500G110
	600:√3			TVVAG600G100	TVVAG600G110

